SKU 543-392

Indicador digital ID-C, ANSI AGD Pulgadas/métrico, **0.5"-0.00005"** lengüeta trasera

Descripción

Este es un indicador multifunción que es confiable y fácil de usar.
El indicador ABSOLUTE Digimatic ID-C le ofrece los siguientes beneficios:

- El sensor ABSOLUTE significa que no tiene que realizar la configuración de origen cada vez que lo enciende, lo que le ahorra tiempo y molestias.
- El juicio GO / ± NG se realiza estableciendo las tolerancias superior e inferior.
- Puede realizar cálculos sencillos mediante un factor definible por el usuario mediante la fórmula Ax ("x" es el desplazamiento del husillo).
- La gran altura de los caracteres de 11 mm proporciona una buena legibilidad.
- Display 330 ° giratorio.
- Un bloqueo de función protege la pantalla contra el uso no autorizado.

Características

Range:	**0.5"/12.7 mm**
Range:	**0,5" Inch**
Digital step:	**0,00005"/0,001 mm**
Maximum Permissible Error E MPE:	**0,0001"/0,003 mm**
H MPE (Hysteresis):	**0,0001"/0,002 mm**
R MPE (Repeatability):	**0,0001"/0,002 mm**
Measuring force:	**≤ 1,5 N**
Protection:	**IP42**
Mass:	**170 g**
Display:	**LCD, character height 11 mm rotatable 330°**
Max. response speed:	**Unlimited**
Alarm:	**Low voltage, counting value composition error, overflow error, tolerance limit setting error**
Stem Ø:	**9,52 mm**
Contact point:	**Carbide ball, thread # 4-48 UNF**
Battery life:	**approx. 7000 hours**
Power supply:	**1 battery SR-44**
Delivered:	**Including 1 battery**
DATA/HOLD:	**Yes**
GO/±NG judgement:	**Yes**
Data output:	**Yes**
ON/OFF:	**Yes**
ZERO/ABS:	**Yes**
PRESET:	**Yes**
Selectable resolution:	**Yes**
Calculation function (with formula):	**Yes**
Counting direction switchable:	**Yes**
Digital/Analog:	**Digital**
Inch-Metric:	**Inch/Metric**
Hysteresis:	**0,0001"/0,002 mm**
Type:	**ASME/ANSI/AGD Standard**

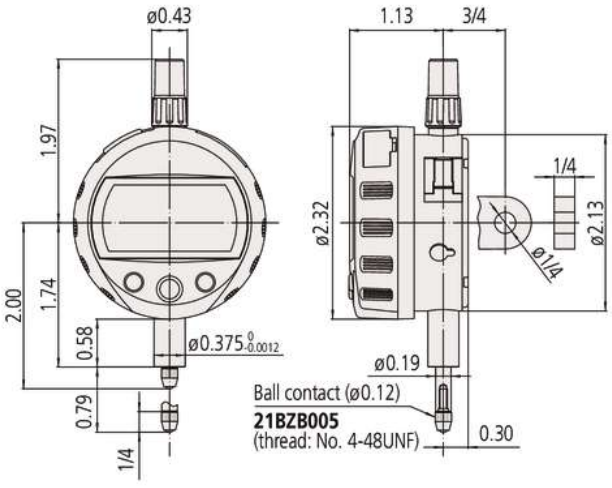

IP54 TÜVRheinland CERTIFIED Safety Dust- and Water-Protected www.tuv.com ID 2011207400

Mitutoyo guarantees the product quality. PROPRIETARY INSPECTION CERTIFICATE Mitutoyo guarantees the product quality.