

# TORQUE TOOLS MECHANICAL WRENCHES

Snap-on® INDUSTRIAL BRANDS




## DIAL TORQUE WRENCHES - DUAL SCALE

Dial Torque Wrenches are designed for the automotive, nuclear and industrial markets in addition to military installations throughout the world. This series features sturdy torsion beam design for dependable long life and accuracy. The small frame model offers working ranges from 3 in. lbs. to 50 ft. lbs. in 1/4" and 3/8" drives. The large frame model continues from 100 ft. lbs. through 2,000 ft. lbs. with 1/2", 3/4" and 1" drives. Accuracy of both series of ± 3% meets or exceeds ASME standards, ISO 6789 bi-directionally from 20% to 100% of scale. All wrenches supplied with a N.I.S.T. traceable certificate of calibration.

### Features

- Sturdy body construction insures durability
- Easy to read laser marked dual scale
- Large easy to read dial is shock resistant and protected by a tough metal guard
- Memory needle retains highest torque reading applied
- Calibrated in both CW and CCW direction
- Accuracy: ± 3% of indicated value, CW & CCW, from 20% to 100% of full scale
- Individually serialized with matching certificate of calibration traceable to N.I.S.T.



## DIAL TORQUE WRENCHES - DUAL SCALE

| Product Code                     | Drive Size | English Range  | Incr.      | Nm Range  | Incr.  | A In.  | B In. | C In. | D In. | Wt. Lbs. |
|----------------------------------|------------|----------------|------------|-----------|--------|--------|-------|-------|-------|----------|
| <b>Memory Needle Models</b>      |            |                |            |           |        |        |       |       |       |          |
| 301LDIN                          | ¼"         | 0-30 in. lb.   | .5 in. lb. | 0-3.5 Nm  | .1 Nm  | 11.5   | 1.1   | 1.2   | 2.75  | 1.1      |
| 751LDIN                          | ¼"         | 0-75 in. lb.   | 1 in. lb.  | 0-9 Nm    | .2 Nm  | 11.5   | 1.1   | 1.2   | 2.75  | 1.1      |
| 1502LDIN                         | ⅜"         | 0-150 in. lb.  | 2 in. lb.  | 0-18 Nm   | .5 Nm  | 11.5   | 1.1   | 1.2   | 2.75  | 1.1      |
| 2502LDIN                         | ⅜"         | 0-250 in. lb.  | 5 in. lb.  | 0-30 Nm   | .5 Nm  | 11.5   | 1.1   | 1.2   | 2.75  | 1.1      |
| 3002LDIN                         | ⅜"         | 0-300 in. lb.  | 5 in. lb.  | 0-35 Nm   | 1 Nm   | 11.5   | 1.1   | 1.2   | 2.75  | 1.1      |
| 6002LDIN                         | ⅜"         | 0-600 in. lb.  | 10 in. lb. | 0-70 Nm   | 2 Nm   | 15     | 1.5   | 1.2   | 2.75  | 1.6      |
| 502LDFN                          | ⅜"         | 0-50 ft. lb.   | 1 ft. lb.  | 0-70 Nm   | 2 Nm   | 15     | 1.5   | 1.2   | 2.75  | 1.6      |
| 1003LDFN                         | ½"         | 0-100 ft. lb.  | 2 ft. lb.  | 0-140 Nm  | 2.5 Nm | 21.75  | 2.25  | 1.50  | 2.75  | 3.70     |
| 1753LDFN                         | ½"         | 0-175 ft. lb.  | 5 ft. lb.  | 0-240 Nm  | 5 Nm   | 21.75  | 2.25  | 1.50  | 2.75  | 3.70     |
| 2503LDFN                         | ½"         | 0-250 ft. lb.  | 5 ft. lb.  | 0-350 Nm  | 10 Nm  | 21.75  | 2.25  | 1.50  | 2.75  | 3.70     |
| 3504LDFN                         | ¾"         | 0-350 ft. lb.  | 10 ft. lb. | 0-480 Nm  | 10 Nm  | 28.00  | 2.25  | 1.50  | 2.75  | 5.75     |
| 6004LDFN*                        | ¾"         | 0-600 ft. lb.  | 10 ft. lb. | 0-800 Nm  | 20 Nm  | 47.00  | 2.50  | 1.50  | 2.75  | 10.10    |
| 10005LDFN*                       | 1"         | 0-1000 ft. lb. | 20 ft. lb. | 0-1400 Nm | 25 Nm  | 74.00  | 2.50  | 3.50  | 3.00  | 30.00    |
| <b>Electric Signaling Models</b> |            |                |            |           |        |        |       |       |       |          |
| 6004LDFE**                       | ¾"         | 0-600 ft. lb.  | 10 ft. lb. | 0-800 Nm  | 20 Nm  | 47.00  | 2.50  | 1.50  | 2.75  | 10.10    |
| 10005LDFE**                      | 1"         | 0-1000 ft. lb. | 20 ft. lb. | 0-1400 Nm | 25 Nm  | 74.00  | 2.50  | 3.50  | 3.00  | 30.00    |
| 20005LDFE***                     | 1"         | 0-2000 ft. lb. | 40 ft. lb. | 0-2800 Nm | 50 Nm  | 122.00 | 3.50  | 6.50  | 3.50  | 47.00    |


\*NOTE: 6004LDFN and 10005LDFN include 1 Extension handle.

\*\*NOTE: 6004LDFE and 10005LDFE include 1 Extension handle, indicating light and buzzer.

\*\*\*NOTE: 20005LDFE is a "T" style wrench with 1" drive female head that can be use with a torque multiplier. Includes 5 piece handle assembly, indicating light and buzzer.



20005LDFE "T" type Dial Wrench must be operated by two persons or a torque multiplier. The handle is over 10 ft. long.

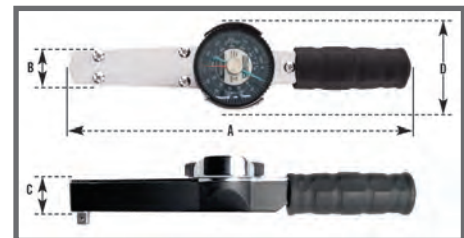

**WARNING**